


锚 · Anchors · Якоря · Ancras · Ancore

N型波尔锚

Pool Anchor · Якорь Пула · Ancla Pool · Ancora Pool

系列 / Series / Серия / Serie: **N** 执行标准 / Standard / Стандарт / Norma: **CB/T 3221-2008** 目录页码 / Catalogue page / Стр. каталога / Página del catálogo / Pagina del catalogo: **54**

型号 / Models / Модели / Modelos / Modelli: YDL-012S, YDL-020S, YDL-040S, YDL-060S, YDL-080S, YDL-100S, YDL-120S, YDL-135S, YDL-180S, YDL-160S, YDL-270S, YDL-315S, YDL-360S, YDL-430S, YDL-495S, YDL-012C, YDL-020C, YDL-040C, YDL-060C, YDL-080C, YDL-100C, YDL-120C, YDL-135C, YDL-180C, YDL-160C, YDL-270C, YDL-315C, YDL-360C, YDL-430C, YDL-495C, YDL-585C, YDL-675C, YDL-765C, YDL-855C, YDL-970C, YDL-1080C, YDL-1195C, YDL-1305C, YDL-1440C, YDL-1575C

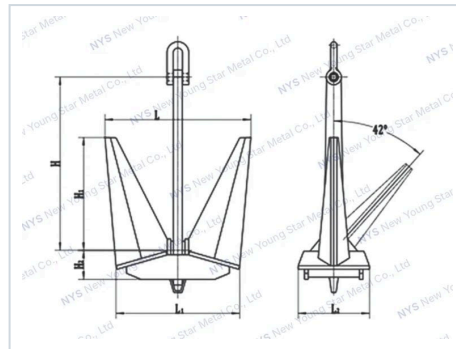

波尔锚是一种大抓力锚型，锚柄与锚头以铰链连接，即使在大风或者浪大的恶劣条件也可以抓住河底。除316不锈钢材质外，您还可以选择碳钢材质表面热镀锌或者表面刷漆。

Pool anchor is a high holding power anchor. The hinged shank delivers consistent setting and holding even in the very worst conditions, whatever the changes in wind and current. Available in hot dipped galvanized & painted steel and stainless steel AISI 316.

Якорь Пула обладает высокой держащей силой. Шарнирное веретено обеспечивает стабильное заглубление и удержание даже в самых тяжёлых условиях, при любых изменениях ветра и течения. Выпускается из горячеоцинкованной или окрашенной стали и из нержавеющей стали AISI 316.

El ancla Pool ofrece un gran poder de agarre. Su caña articulada garantiza un agarre y una sujeción constantes incluso en las peores condiciones, sean cuales sean los cambios de viento y corriente. Disponible en acero galvanizado en caliente y pintado, y en acero inoxidable AISI 316.

L'ancora Pool offre un elevato potere di tenuta. Il fuso incernierato garantisce presa e tenuta costanti anche nelle condizioni più difficili, con qualsiasi variazione di vento e corrente. Disponibile in acciaio zincato a caldo o verniciato e in acciaio inox AISI 316.

产品特点 · Features · Особенности · Características · Caratteristiche

中文

- 该款不锈钢锚型可以做500kg以下的任何重量规格，碳钢材质的波尔锚可以提供LR、BV、DNV-GL、CCS等各大船级社证

Русский

- Якоря данного типа из нержавеющей стали изготавливаются на заказ массой до 500kg
- Сертификация: LR, BV, DNV-GL, CCS и др.

Italiano

- Questo tipo di ancora in acciaio inox può essere realizzato su misura fino a 500kg
- Certificazioni: LR, BV, DNV-GL, CCS, ecc.

English

- This type stainless steel anchor can customized less than 500kg
- Certification: LR, BV, DNV-GL, CCS, etc.

Español

- Este tipo de ancla de acero inoxidable puede fabricarse a medida con un peso inferior a 500kg
- Certificación: LR, BV, DNV-GL, CCS, etc.

技术参数 · Specifications · Технические характеристики · Especificaciones · Specifiche tecniche

规格型号 / Specification / Технические характеристики / Especificaciones / Specifiche

Stainless steel Part No 不锈钢型号 / Артикул (нерж. сталь) / Ref. acero inoxidable / Codice inox	Steel Part No 碳钢型号 / Артикул (углеродистая сталь) / Ref. acero / Codice acciaio	Weight (kg) 重量(kg) / Масса (kg) / Peso (kg)	H(mm)	H1(mm)	H2(mm)	L(mm)	L1(mm)	L2(mm)
YDL-012S	YDL-012C	12	385	250	65	325	275	155

Stainless steel Part No 不锈钢型号 / Артикул (нерж. сталь) / Ref. acero inoxidable / Codice inox	Steel Part No 碳钢型号 / Артикул (углеродистая сталь) / Ref. acero / Codice acciaio	Weight (kg) 重量(kg) / Масса (kg) / Peso (kg)	H(mm)	H1(mm)	H2(mm)	L(mm)	L1(mm)	L2(mm)
YDL-020S	YDL-020C	20	455	300	75	385	325	185
YDL-040S	YDL-040C	40	570	370	95	480	410	235
YDL-060S	YDL-060C	60	655	425	110	555	470	270
YDL-080S	YDL-080C	80	720	470	120	610	515	295
YDL-100S	YDL-100C	100	775	505	130	655	555	320
YDL-120S	YDL-120C	120	825	540	135	700	595	340
YDL-135S	YDL-135C	135	856	562	139	723	614	342
YDL-180S	YDL-180C	180	943	618	153	796	676	377
YDL-160S	YDL-160C	225	1015	666	165	858	729	406
YDL-270S	YDL-270C	270	1079	708	75	911	774	431
YDL-315S	YDL-315C	315	1136	745	184	959	815	454
YDL-360S	YDL-360C	360	1188	779	193	1003	852	475
YDL-430S	YDL-430C	430	1260	826	204	1064	904	504
YDL-495S	YDL-495C	495	1321	866	214	1115	948	528
	YDL-585C	585	1396	916	226	1179	1002	558
	YDL-675C	675	1464	960	237	1237	1051	585
	YDL-765C	765	1527	1001	248	1290	1096	610
	YDL-855C	855	1584	1039	257	1338	1137	633
	YDL-970C	970	1653	1084	268	1396	1186	660
	YDL-1080C	1080	1713	1123	278	1447	1229	684
	YDL-1195C	1195	1772	1162	287	1496	1271	708
	YDL-1305C	1305	1824	1196	296	1541	1309	729
	YDL-1440C	1440	1885	1236	306	1592	1353	753
	YDL-1575C	1575	1942	1274	315	1641	1394	776